
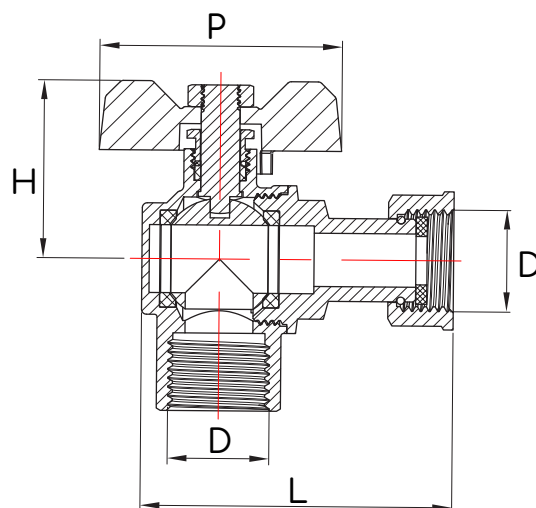
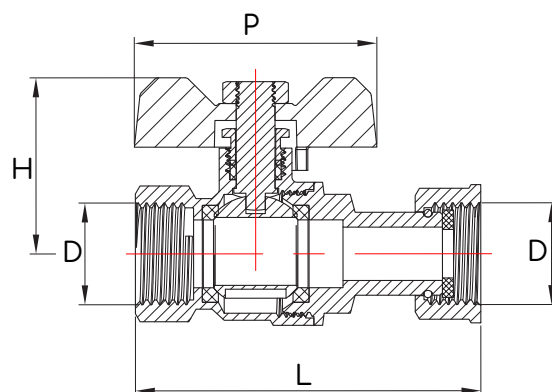


ZAWÓR KULOWY Z NAKRĘTKĄ

- prosty
- kątowy

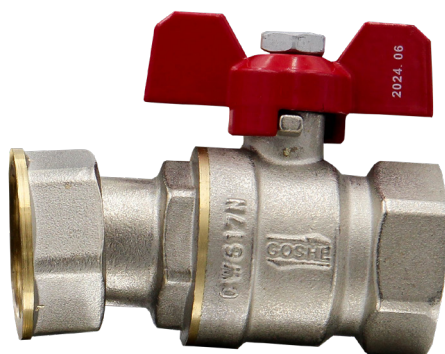

DANE TECHNICZNE		rodzaj	indeks	DN	H (mm)	D (col)	L (mm)	P (mm)	ilość m/d
maks. ciśnienie pracy	1,0 MPa	prosty	0200.364	15	37,5	1/2"	71,5	50	15/120
maks. temperatura pracy	maks 120°C		0200.365	20	39,5	3/4"	80,5	50	8/80
media robocze	ciepła, zimna woda		0200.366	25	62,5	1"	95,5	62,5	6/48
MATERIAŁY		kątowy	0200.375	15	37	1/2"	64	50	12/96
korpus	mosiądz CW167N		0200.376	20	41	3/4"	73	50	10/60
trzonek, dławik	mosiądz CW167N		0200.377	25	51,5	1"	87	62,5	4/40
uszczelka kuli i trzpienia	PTFE								

GOSHE

ul. Zientary-Malewskiej 41A 10-307 Olsztyn



www.goshe.pl



info@goshe.pl



+48 664 327 590